


V4JSD - 4" DEEP 45 DEGREE STANDARD J BLADE EXTRUDED ALUMINUM LOUVERED EQUIPMENT SCREEN

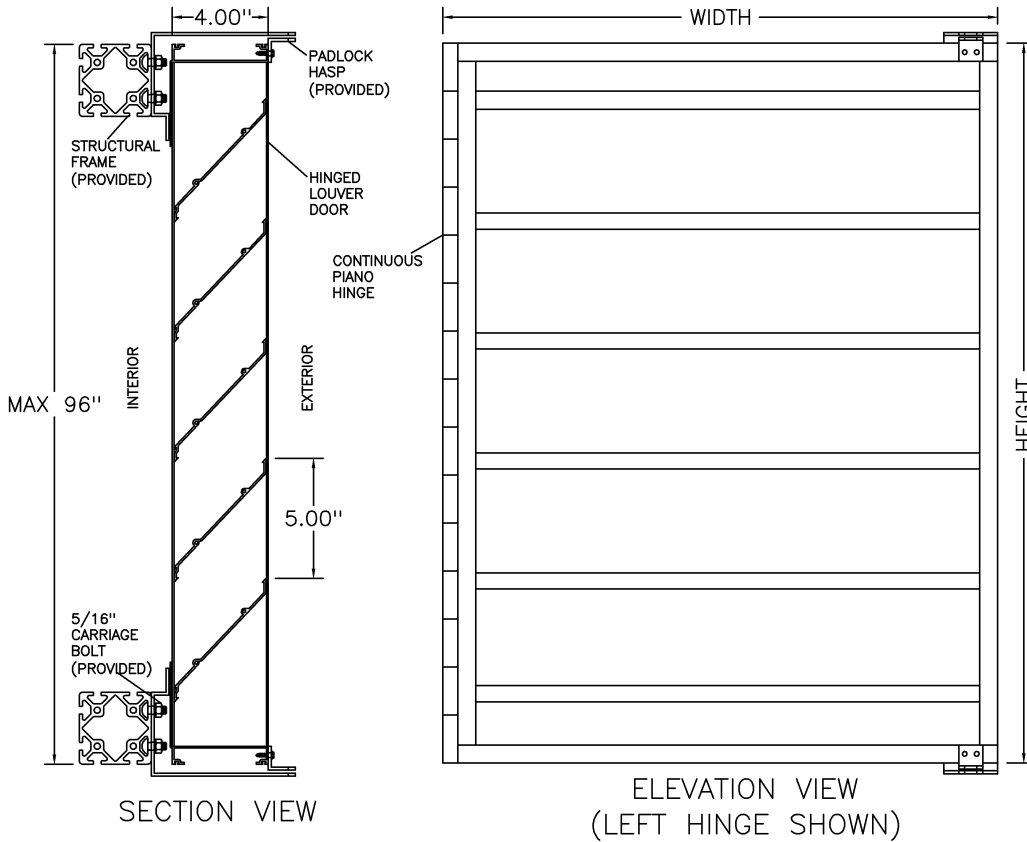

LOUVER BLADE - 0.081" THICKNESS
TYPE 6063-T5 EXTRUDED ALUMINUM

LOUVER FRAME - 0.081" THICKNESS
TYPE 6063-T5 EXTRUDED ALUMINUM

STRUCTURAL FRAME - 3" X 3" AND
1.5" X 1.5" STRUCTURAL ALUMINUM
MODULAR FRAMING - TYPE 6063-T6

HINGE - .120" THICKNESS ALUMINUM
CONTINUOUS PIANO HINGE

LATCH - STANDARD PADLOCK/BOLT
HASP TOP AND BOTTOM (LATCH OR
LOCK BY OTHERS)

FASTENERS - STAINLESS STEEL 5/16
- 18 CARRIAGE BOLTS, NUTS, AND
WASHERS

DESIGNED FOR 100 MPH WIND LOAD

SIZES 24" WIDE X 24" HIGH UP TO
UNLIMITED WIDE X 96" HIGH

OPTIONS:
HIGHER WIND LOAD RATINGS
ARCHITECTURAL FINISHES

DOOR SWING	VERTICAL SECTION	VERTICAL MULLION (MULTIPLE PANELS WIDE)	OUTSIDE CORNER
<p>LEFT HINGE</p>	<p>5/16" CARRIAGE BOLTS (PROVIDED)</p> <p>STOP GASKET (PROVIDED)</p>	<p>PADLOCK HASP (PROVIDED)</p> <p>HEAVY DUTY ALUMINUM HINGE (PROVIDED)</p> <p>EXTERIOR</p> <p>HINGED DOOR</p>	<p>PADLOCK HASP (PROVIDED)</p> <p>ALUMINUM BOX CORNER (PROVIDED)</p> <p>EXTERIOR</p> <p>7.88" TYP.</p> <p>INTEGRAL DOOR STOP (PROVIDED)</p>
<p>RIGHT HINGE</p>	<p>PADLOCK HASP TOP AND BOTTOM (PROVIDED)</p> <p>LATCH BRACKET ATTACHMENT DETAIL</p>	<p>INTEGRAL DOOR STOP (PROVIDED)</p> <p>STRUCTURAL FRAME (PROVIDED)</p>	<p>STRUCTURAL FRAME (PROVIDED)</p> <p>INTEGRAL DOOR STOP (PROVIDED)</p>

ARCHITECTURAL L·O·U·V·E·R·S

266 W Mitchell Ave - Cincinnati, OH 45232
PH: (888) 568-8371 Fax: (888) 568-8370

PROJECT

CONTRACTOR

ARCHITECT



DRAWN BY:
JRR

DATE:
07/2010

DRAWING TYPE:
TECHNICAL SHEET

DRAWING TITLE:
V4JSD.1

V4JSD - 4" DEEP 45 DEGREE STANDARD J BLADE EXTRUDED ALUMINUM LOUVERED EQUIPMENT SCREEN

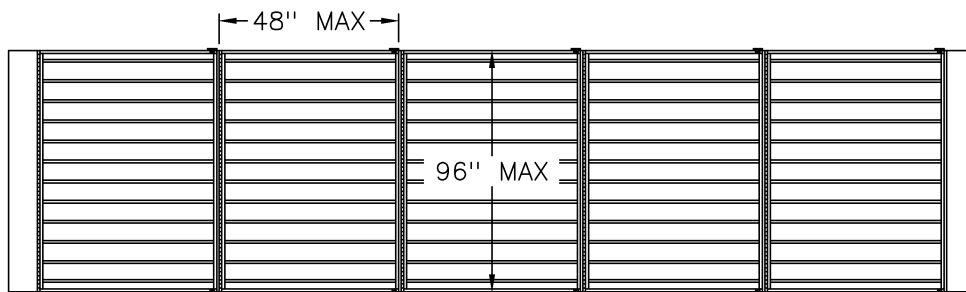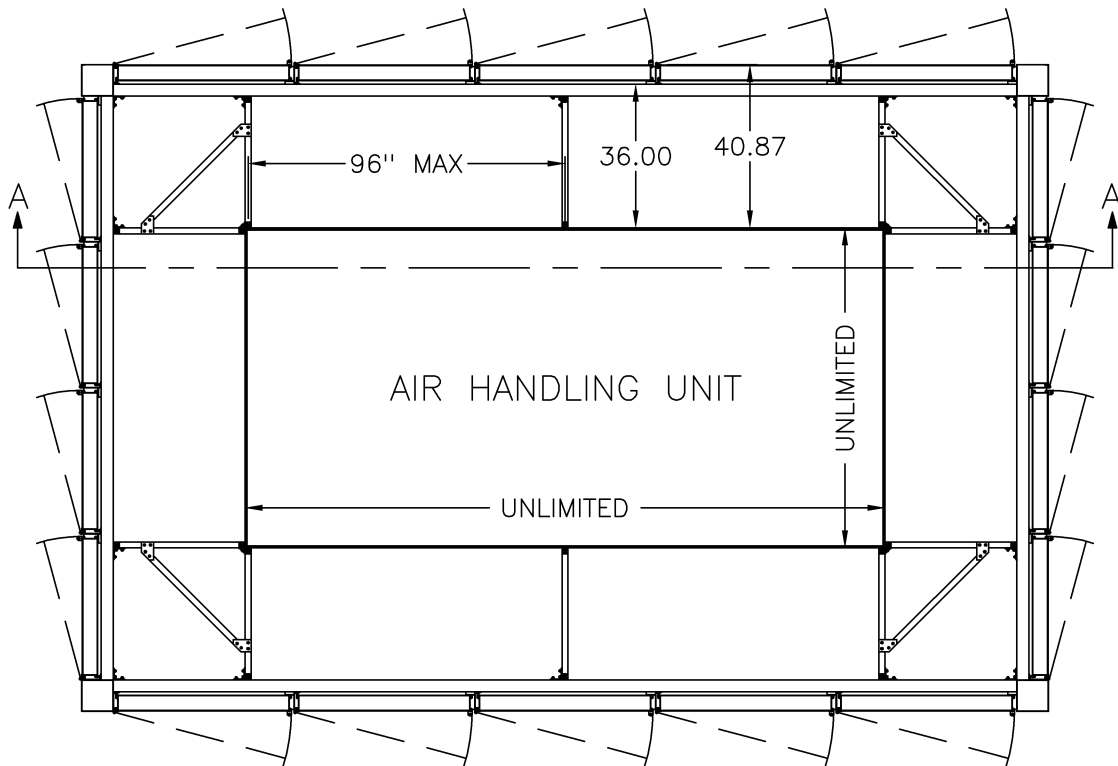

**ARCHITECTURAL
L·O·U·V·E·R·S**

266 W Mitchell Ave - Cincinnati, OH 45232
PH: (888) 568-8371 Fax: (888) 568-8370

PROJECT

CONTRACTOR

ARCHITECT

DRAWN BY:
JRR

DATE:
07/2010

DRAWING TYPE:
TECHNICAL SHEET

DRAWING TITLE:
V4JSD.1