
V6JN3 - 6" DEEP 25 DEGREE NARROW N BLADE 3" SPACING EXTRUDED ALUMINUM LOUVERED EQUIPMENT SCREEN

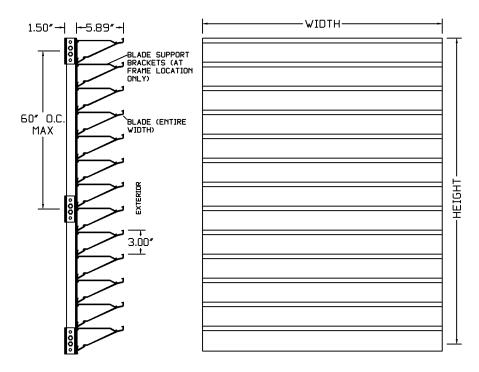

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

FRAME - CONCEALED 0.125'
THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 30 PSF WIND LOAD

SIZES 12' WIDE X 12' HIGH UP TO UNLIMITED SIZE AVAILABLE

OPTIONS:

HIGHER WIND LOAD RATINGS

ARCHITECTURAL FINISHES

HINGED SINGLE AND DOUBLE DOORS

NOTE:

STRUCTURAL FRAMING TO SUPPORTING STRUCTURE (ROOF DECK, WALLS, CONCRETE PAD, ETC.) BY OTHERS. STRUCTURAL FRAMING IS REQUIRED FOR ATTACHMENT POINTS EVERY 60° OF WIDTH AND HEIGHT TO MEET 30 PSF WIND LOAD.

SECTION VIEW

ELEVATION VIEW

