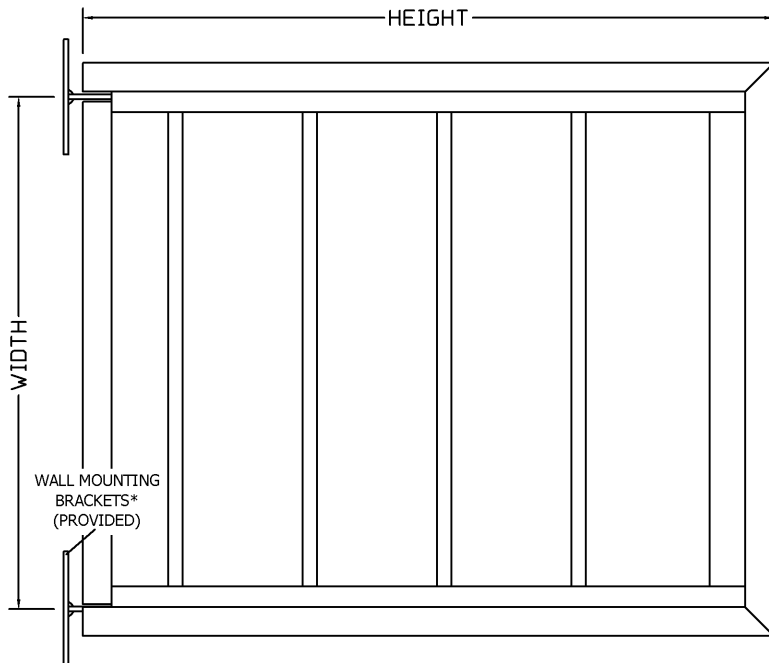
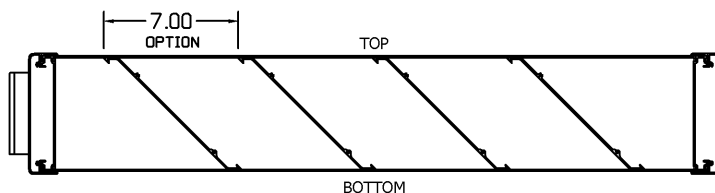


H6JS - 6" DEEP 45 DEGREE STANDARD J BLADE EXTRUDED ALUMINUM STATIONARY SUNSHADE



TOP VIEW



SECTION VIEW

BLADE - 0.081" THICKNESS TYPE 6063-T5
EXTRUDED ALUMINUM

FRAME - 0.081" THICKNESS TYPE 6063-T5
EXTRUDED ALUMINUM

OUTRIGGERS - 0.125" THICKNESS TYPE
6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 30 PSF WIND LOAD

SIZES 12" WIDE X 12" HIGH UP TO
UNLIMITED SIZE AVAILABLE

ALL FASTENERS CONCEALED FROM VIEW

OPTIONS:

VERTICAL OR HORIZONTAL ORIENTATION

MULLION CONNECTIONS FOR CONTINUOUS
RUNS

MITERED CORNER JOINING PANELS

BLADE SPACING 7" OR 8"

MOUNTING FOR VARIOUS WALL TYPES*






VARIOUS EDGE TRIM DESIGNS

HIGHER WIND LOAD RATINGS

ARCHITECTURAL FINISHES

* SEE MOUNTING OPTIONS TECHNICAL
SHEET FOR WALL BRACKETS

** SEE OUTRIGGER OPTIONS TECHNICAL
SHEET FOR OUTRIGGER TYPES AND SHAPES

CONSTRUCTION	INNER TRIM	OUTER TRIM	OUTRIGGER	BLADE SPACING
STANDARD	 TUBE "T" TRIM	 TUBE "T" TRIM	 "I" SHAPE OUTRIGGER	 7"  8" BLADE SPACING
 266 W Mitchell Ave - Cincinnati, OH 45232 PH: (888) 568-8371 Fax: (888) 568-8370		PROJECT		
		CONTRACTOR		
		ARCHITECT		
		DRAWN BY: JRR	DATE: 11/2025	DRAWING TYPE: TECHNICAL SHEET DRAWING TITLE: H6JS