

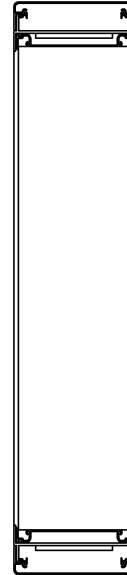


# H6TS - 6" DEEP RECTANGULAR TUBE BLADE EXTRUDED ALUMINUM STATIONARY SUN SHADE

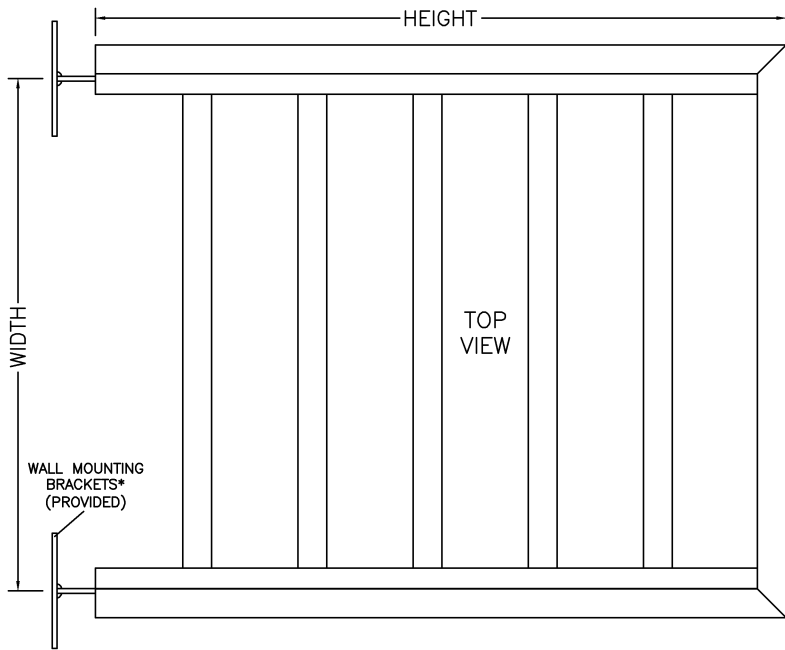

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM  
 FRAME - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM  
 OUTRIGGERS - 0.125" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM  
 DESIGNED FOR 100 MPH WIND LOAD  
 SIZES 12" WIDE X 12" HIGH UP TO UNLIMITED SIZE AVAILABLE  
 ALL FASTENERS CONCEALED FROM VIEW

OPTIONS:  
 VERTICAL OR HORIZONTAL ORIENTATION  
 MULLION CONNECTIONS FOR CONTINUOUS RUNS  
 MITERED CORNER JOINING PANELS  
 BLADE SPACING 4", 6", OR 8"  
 MOUNTING FOR VARIOUS WALL TYPES\*  
 VARIOUS EDGE TRIM DESIGNS  
 HIGHER WIND LOAD RATINGS  
 ARCHITECTURAL FINISHES

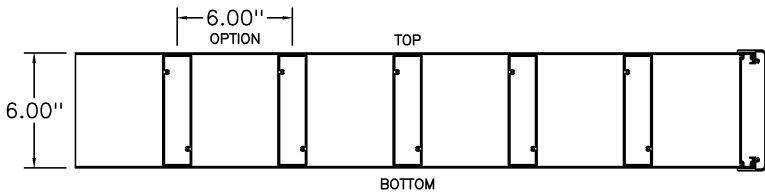

\* SEE MOUNTING OPTIONS TECHNICAL SHEET FOR WALL BRACKETS  
 \*\* SEE OUTRIGGER OPTIONS TECHNICAL SHEET FOR OUTRIGGER TYPES AND SHAPES

CONSTRUCTION	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL
TRIM OPTIONS	 TUBE "T" TRIM	 BULLNOSE "B" TRIM	 ROUND TAPER "R" TRIM	 FLAT TRIM
OUTRIGGERS / BLADES	 "I" SHAPE OUTRIGGER	 FLAT OUTRIGGER	 BLADE SPACING	

## ARCHITECTURAL · O · U · V · E · R · S

266 W Mitchell Ave - Cincinnati, OH 45232  
 PH: (888) 568-8371 Fax: (888) 568-8370

PROJECT		DRAWING TYPE:	DRAWING TITLE:
CONTRACTOR		TECHNICAL SHEET	H6TS
ARCHITECT			
DRAWN BY: JRR	DATE: 02/2010		