



# V6JS - 6" DEEP 45 DEGREE STANDARD J BLADE EXTRUDED ALUMINUM EQUIPMENT SCREEN

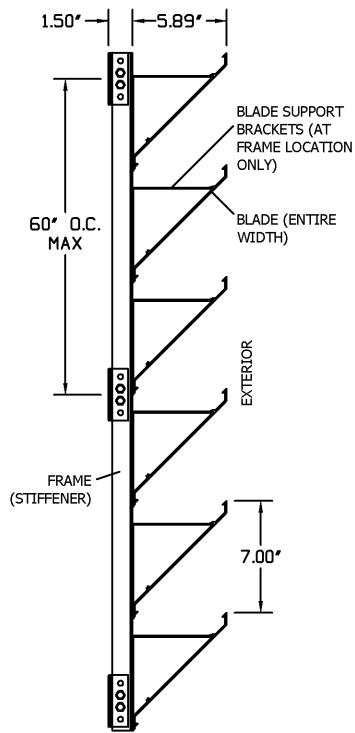

SECTION VIEW

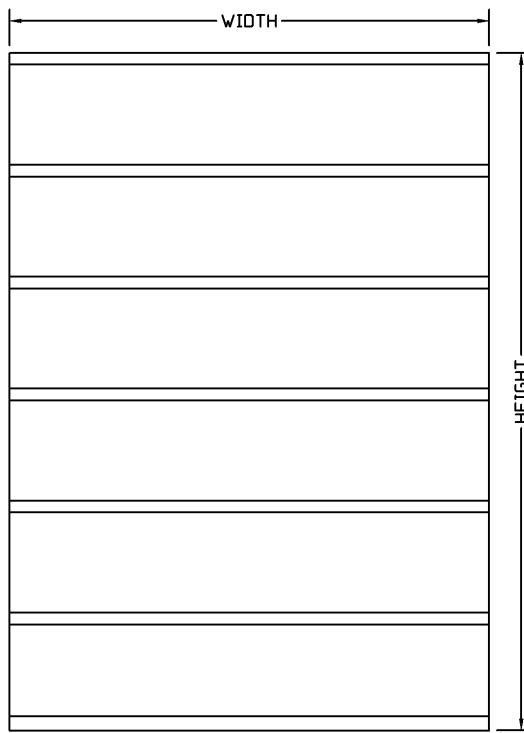

ELEVATION VIEW

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

FRAME - CONCEALED 0.125" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 30 PSF WIND LOAD

MINIMUM SIZE: 12" WIDE X 12" HIGH

MAXIMUM SIZE - UNLIMITED WITH JOINED PANELS

MAXIMUM PANEL SIZE: 60" WIDE X 120" HIGH OR 120" WIDE X 60" HIGH

## OPTIONS:

HIGHER WIND LOAD RATINGS

ARCHITECTURAL FINISHES

HINGED SINGLE AND DOUBLE DOORS

## NOTE:

STRUCTURAL FRAMING TO SUPPORTING STRUCTURE (ROOF DECK, WALLS, CONCRETE PAD, ETC.) BY OTHERS. STRUCTURAL FRAMING IS REQUIRED FOR ATTACHMENT POINTS EVERY 60" OF WIDTH AND HEIGHT TO MEET 30 PSF WIND LOAD.

END PANEL	BLADE STIFFENER	VERTICAL MULLION (MULTIPLE PANELS WIDE)	MITERED OUTSIDE CORNER
PLAN VIEW BLADE SUPPORT BRACKETS EXTERIOR HIDDEN 1.25 STIFFENER	PLAN VIEW BLADE SUPPORT BRACKET EXTERIOR HIDDEN 1.25 STIFFENER (EVERY 60" WIDTH MAX)	PLAN VIEW BLADE SUPPORT BRACKET EXTERIOR HIDDEN 1.25 STIFFENERS (JOINED BY INSTALLER)	PLAN VIEW BLADE SUPPORT BRACKETS CORNERS MITERED AND WELDED EXTERIOR HIDDEN 1.25 STIFFENERS (JOINED BY INSTALLER) 9.39 TYP.
<b>TYPICAL MOUNTING</b> (VERTICAL MULLION SHOWN)			
PLAN VIEW EXTERIOR BLADE SUPPORT BRACKETS 1.50 FASTENER TO STRUCTURAL (BY OTHERS)	SECTION VIEW STIFFENERS (JOINED BY INSTALLER) 5/16" SS FASTENERS (PROVIDED LOOSE) 1-1/4" X 2" X 3-1/4" LONG CLIP ANGLE (PROVIDED LOOSE) STRUCTURAL FRAMING (BY OTHERS)	SECTION VIEW STIFFENERS (JOINED BY INSTALLER) EXTERIOR HIDDEN	
<b>PROJECT</b>			
<b>CONTRACTOR</b>			
<b>ARCHITECT</b>			
DRAWN BY: JRR	DATE: 06/2025	DRAWING TYPE: TECHNICAL SHEET	DRAWING TITLE: V6JS

**ARCHITECTURAL**  
· O · U · V · E · R · S

266 W Mitchell Ave - Cincinnati, OH 45232  
PH: (888) 568-8371 Fax: (888) 568-8370