


# V6JN5 - 6" DEEP 25 DEGREE NARROW N BLADE 5" SPACING EXTRUDED ALUMINUM LOUVERED EQUIPMENT SCREEN

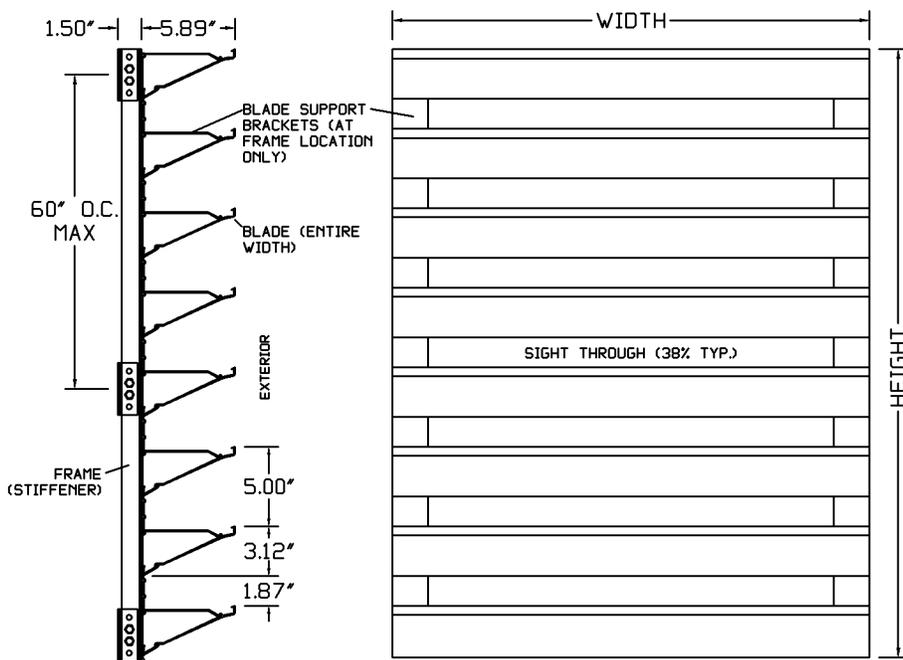

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM  
 FRAME - CONCEALED 0.125" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM  
 DESIGNED FOR 30 PSF WIND LOAD  
 SIZES 12" WIDE X 12" HIGH UP TO UNLIMITED SIZE AVAILABLE

OPTIONS:  
 HIGHER WIND LOAD RATINGS  
 ARCHITECTURAL FINISHES  
 HINGED SINGLE AND DOUBLE DOORS

NOTE:  
 STRUCTURAL FRAMING TO SUPPORTING STRUCTURE (ROOF DECK, WALLS, CONCRETE PAD, ETC.) BY OTHERS. STRUCTURAL FRAMING IS REQUIRED FOR ATTACHMENT POINTS EVERY 60" OF WIDTH AND HEIGHT TO MEET 30 PSF WIND LOAD.

SECTION VIEW

ELEVATION VIEW

END PANEL	BLADE STIFFENER	VERTICAL MULLION (MULTIPLE PANELS WIDE)	MITERED OUTSIDE CORNER
<p>BLADE SUPPORT BRACKETS EXTERIOR</p> <p>1.25" STIFFENER</p> <p>HIDDEN</p>	<p>BLADE SUPPORT BRACKET EXTERIOR</p> <p>1.25" STIFFENER (EVERY 60" WIDTH MAX)</p> <p>HIDDEN</p>	<p>BLADE SUPPORT BRACKET EXTERIOR</p> <p>1.25" STIFFENERS (JOINED BY INSTALLER)</p> <p>HIDDEN</p>	<p>BLADE SUPPORT BRACKETS EXTERIOR</p> <p>9.39" CORNERS MITERED AND WELDED</p> <p>1.25" STIFFENERS (JOINED BY INSTALLER)</p> <p>9.39"</p>
<p>TYPICAL MOUNTING (VERTICAL MULLION SHOWN)</p>		<p>HORIZONTAL MULLION (MULTIPLE PANELS HIGH)</p>	
<p>EXTERIOR</p> <p>BLADE SUPPORT BRACKETS</p> <p>1.50"</p> <p>FASTENER TO STRUCTURAL (BY OTHERS)</p> <p>5/16" SS FASTENERS (PROVIDED LOOSE)</p> <p>1-1/4" X 2" X 3-1/4" LONG CLIP ANGLE (PROVIDED LOOSE)</p> <p>STIFFENERS (JOINED BY INSTALLER)</p> <p>STRUCTURAL FRAMING (BY OTHERS)</p>		<p>SECTION VIEW</p> <p>STIFFENERS (JOINED BY INSTALLER)</p> <p>EXTERIOR</p> <p>HIDDEN</p>	
<p><b>ARCHITECTURAL L·O·U·V·E·R·S</b></p> <p>266 W Mitchell Ave - Cincinnati, OH 45232              PH: (888) 568-8371 Fax: (888) 568-8370</p>		<p>PROJECT</p> <p>CONTRACTOR</p> <p>ARCHITECT</p>	<p>DRAWING TYPE: TECHNICAL SHEET</p> <p>DRAWING TITLE: V6JN5</p>