


V6JN5 - 6" DEEP 25 DEGREE NARROW N BLADE 5" SPACING EXTRUDED ALUMINUM LOUVERED EQUIPMENT SCREEN

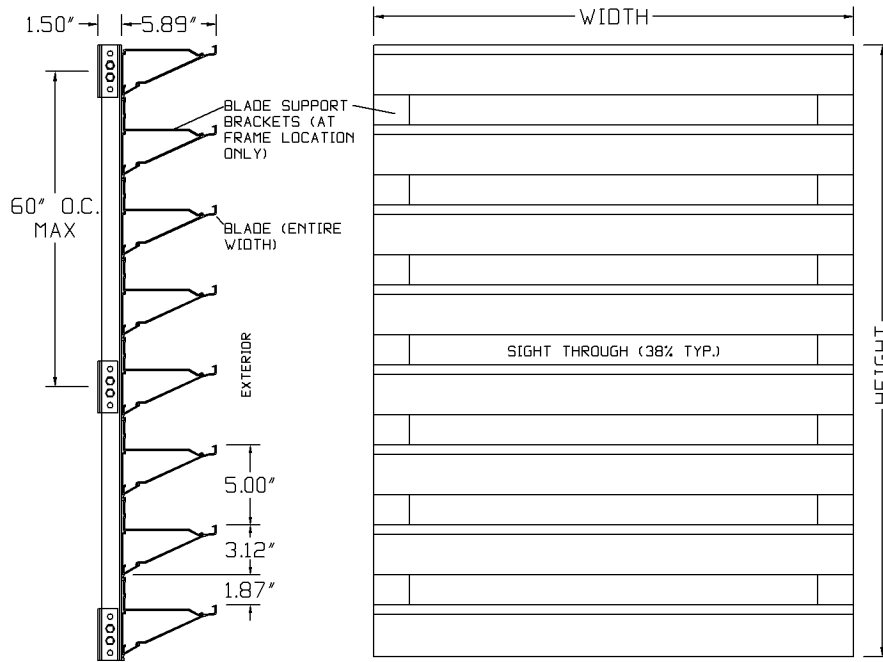

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM
 FRAME - CONCEALED 0.125" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 100 MPH WIND LOAD
 SIZES 12" WIDE X 12" HIGH UP TO UNLIMITED SIZE AVAILABLE

OPTIONS:
 HIGHER WIND LOAD RATINGS
 ARCHITECTURAL FINISHES

NOTE:
 STRUCTURAL FRAMING TO SUPPORTING STRUCTURE (ROOF DECK, WALLS, CONCRETE PAD, ETC.) BY OTHERS. STRUCTURAL FRAMING IS REQUIRED EVERY 60" OF WIDTH OR HEIGHT TO MEET 100 MPH WIND LOAD.

SECTION VIEW

ELEVATION VIEW

END PANEL	BLADE STIFFENER	VERTICAL MULLION (MULTIPLE PANELS WIDE)	MITERED OUTSIDE CORNER
<p>BLADE SUPPORT BRACKETS EXTERIOR</p> <p>1.25" STIFFENER</p> <p>HIDDEN</p>	<p>BLADE SUPPORT BRACKET EXTERIOR</p> <p>1.25" STIFFENER (EVERY 60" WIDTH MAX)</p> <p>HIDDEN</p>	<p>BLADE SUPPORT BRACKET EXTERIOR</p> <p>1.25" STIFFENERS (JOINED BY INSTALLER)</p> <p>HIDDEN</p>	<p>BLADE SUPPORT BRACKETS EXTERIOR</p> <p>CORNERS MITERED AND WELDED</p> <p>1.25" STIFFENERS (JOINED BY INSTALLER)</p> <p>8.25"</p> <p>8.25"</p>
<p>TYPICAL MOUNTING (VERTICAL MULLION SHOWN)</p>		<p>HORIZONTAL MULLION (MULTIPLE PANELS HIGH)</p>	
<p>EXTERIOR</p> <p>BLADE SUPPORT BRACKETS</p> <p>1.50"</p> <p>FASTENER TO STRUCTURAL (BY OTHERS)</p> <p>5/16" SS FASTENERS (PROVIDED LOOSE)</p> <p>1-1/4" X 2" X 3-1/4" LONG CLIP ANGLE (PROVIDED LOOSE)</p> <p>STRUCTURAL FRAMING (BY OTHERS)</p> <p>STIFFENERS (JOINED BY INSTALLER)</p>		<p>SECTION VIEW</p> <p>STIFFENERS (JOINED BY INSTALLER)</p> <p>EXTERIOR</p> <p>HIDDEN</p>	
<p>ARCHITECTURAL L·O·U·V·E·R·S</p> <p>266 W Mitchell Ave - Cincinnati, OH 45232 PH: (888) 568-8371 Fax: (888) 568-8370</p>		<p>PROJECT</p> <p>CONTRACTOR</p> <p>ARCHITECT</p>	<p>DRAWING TYPE: TECHNICAL SHEET</p> <p>DRAWING TITLE: V6JN5</p>